

Beach Goer V100 弄潮V100

产品规格 Specification:

输入电压: AC100-240V, 47-60Hz
 额定功率: 15W (25°C典型满载瞬时功率12W)
 灯具效率: >0.8,非线性成像光路,整灯发光效能>4l.1lm/W.
 光源亮度: 6颗Lumiled白光LED,700mA驱动,总493流明输出,轴向3M处最强52Lux
 光源色温: 可模拟日出最暖到阴天最冷色温, 1700K-8000K色
 光场(10%)角: 标准90°, 光斑拼接设计可按照75度进行计算
 控制信号: 符合WH/T 32-2008 DMX512-A标准, Arm内核MCU输出32位精度调光, PWM>600Hz, 摄像无频闪调光曲线: 内置Dim0-Dim4 5种调光曲线, 低DMX数值调光平滑,无跳闪, 无视觉冲击
 控制模式: 自走/主从模式, 亮度可调, 效果速度可调
 通道: 5CH, 亮度, 颜色、速度、频闪、调光曲线, 可选择10CH
 显示: 触摸控制屏幕, LED显示可自动关闭, 自动显示DMX信号正常与否
 外壳材料: 压铸铝ADC12, 标准哑光喷粉黑色, 可定制喷漆白色, 可配备挡光板
 安规等级: 电气II级, 输入3C*1.5mm2 黑色橡胶线(VDE, CCC), 防火V-1, 防护IP66, 配备透气阀平衡内外气压
 工作温度: -20~+45°C, 外壳最高温度60°C@25°C环境下
 认证类别: 产品通过CE,Rohs, 电源通过CQC, UL60950,UL8750等
 绝缘参数: 抗电强度1.5KV, 阻抗强度 > 2 MΩ
 净重: 2.2KG, 含3mm厚度折弯钣金支撑架
 尺寸: L*W*H=165*145*184mm

Voltage input: AC100-240V, 47-60Hz.
 Rated Power: 15W (12W@25°C Peak output)
 Luminaire Efficiency: >0.8, Light Efficacy >4l.1lm/W.
 LED Lumens: 6pcs * Lumiled White color LED 700mA Driving, total 493 Lumens, Max 52 Lux @ 3 Meters
 LED CCT: could be sun up to sunset all CCT, 1700K-8000K.
 Field Angle(10%): standard 90°, when connect light beam with no related dark hole calculate as 75°
 Control signal: DMX512, 32 bit ARM MCU, PWM>600Hz, Video flicker free.
 Dimming Curve: Dim 4 square law dimming, smooth in low DMX Value dimming, not Jumping, no vision shock
 Control mode: Meet E1.11 - 2004 USITT DMX512-A/stand alone/master and slave, effect speed and brightness adjustable.
 Chanel option: 5CH, Dimmer, Color, Speed, Shutter, dimming Curve, could choose 10CH.
 Housing material: Die cast aluminum ADC12, standard Matte black, customized glossy White painting, barndoor available.
 Safty: Class II, 3C*1.5mm2 VDE cable, Flame Rating V-1, Protect Rated IP66 with Vent.
 Operate temperature: -20~+45°C, Lamp body peak temperature 60°C@25°C Environment.
 Certification: Product pass CE, Rohs, SMPS pass CQC or UL60950, UL8750.
 Insulated: Dielectric strength 1.5KV, Impedance strength > 2 MΩ
 Weight: 1.5KG, with yokes 3mm thick supporting bracket.
 Size: L*W*H=165*145*184mm




产品特点 Features:

理念为水射光, 亦即水漾光影
 模拟风力吹拂下的动态水面反射太阳光到受照物
 正向投光式应用, 水波纹交叉荡漾, 速度可调, 光斑角度适中, 可拼接
 Lumiled LED灯珠, 低功耗, 性能稳定, 寿命长, 高亮度, 493流明输出
 DMX512信号控制, 自走、主从机控制, 多机互联控制, 触摸设置led显示屏
 LED显示可自动关闭, 自动显示DMX信号正常与否
 内置Dim4曲线调光从0-100%, 调光频率600Hz, 拍照无闪烁
 内置温度控制功能, 当LED工作过热时, 智能降低LED的输出功率, 15000小时产品寿命
 配备透气阀, 内外气压平衡, 玻璃面内部受热时无雾气

Waterwave reflecting effect under wind, speed adjustable, could connect.
 Lumiled LED, 493 Lumens Output, Low consumption, stable performance, long longevity.
 DMX512 signal control, touch setting with LED screen.
 Display could auto turn off after no operation, show DMX signal situation to make testing easier.
 Dim 4 Square law dimming, video flicker free, with strobe/gradual change inbuilt programs;
 NTC temperature control system inside, reduce the power output when LED working temperature is too high.
 With waterproof air vent to balance pressure, get rid of moisture on glass innerface.

优点

- 使用非线性光学成像技术
- 水射光理念光学效果与自然光学效果高度吻合
- 吻合大量诗意盎然的情景: 水漾清波, 揉香弄影
- 光斑高对比度, 速度可调, 可拼接
- 模拟太阳照射到水面上反射到建筑物与植物上的斑驳光影

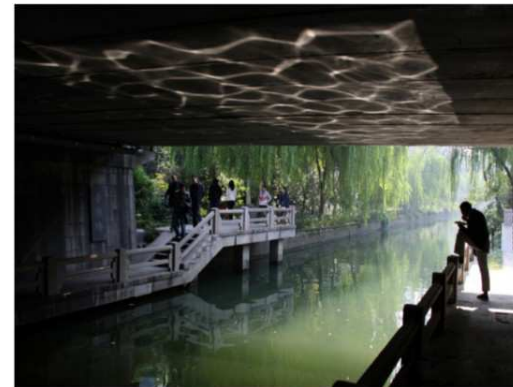

The Element Series 美丽中国系列 Beach Goer V100 弄潮V100